



Installation and Instructions

Box Contents:

1. Belt guard assembly
2. Mounting hardware
3. Installation and use instructions

Installation Instructions

1. **DISCONNECT MACHINE FROM THE POWER SOURCE**
2. Attach mounting bracket to vertical shaft using supplied hardware. (Fig. 3). Finger tighten hardware.
3. Hold vertical shaft so bottom is slightly below the top of the sanding work table. (Fig. 1 & 2). Hold guard assembly in place, keeping level and $3/16"$ to $1/4"$ away from the belt.
4. Mark hole locations using mounting bracket as a template.
5. Check for hardware clearance and any obstruction at marks BEFORE drilling holes. Drill $5/16"$ holes at marked locations.
6. Secure mounting bracket using supplied hardware.
7. Adjust all components and tighten all hardware before restoring power to the machine.

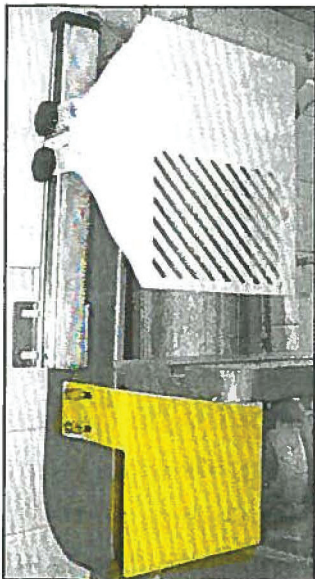


Fig. 1
Left hand mount and
lower belt guard

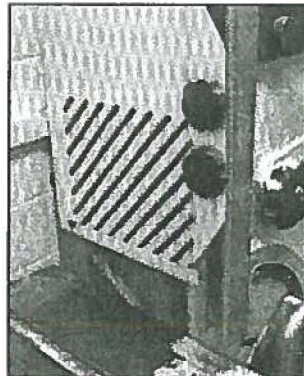


Fig. 2
Right hand mount

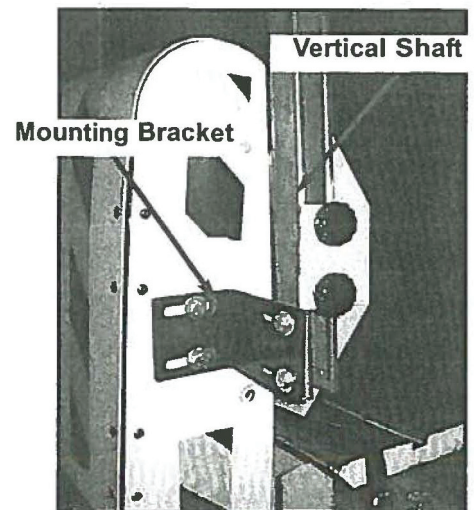


Fig. 1
Left side of cover

FLEXBAR MACHINE CORPORATION

250 Gibbs Road
Islandia, NY 11749
(800) 879-7575 • (631) 582-8440
sales@flexbar.com
www.flexbar.com