



309 SERIES DIAL THICKNESS GAGES STANDARD AND SPECIAL APPLICATIONS




Notable Features

- Fast, repeatable measurements.
- Cast aluminum design, light-weight, easy “one-hand” operation.
- Spring-loaded contact, no operator influence on measurement.
- Lower contact sits on a tripod for easy adjustment and alignment.
- Rugged for shop-use.
- Large selection of indicators and frames.

Custom and Special Models

We will modify the arms and contacts to meet your special applications.

Send your present gage to Dyer's repair center and we will upgrade it to electronic indication.

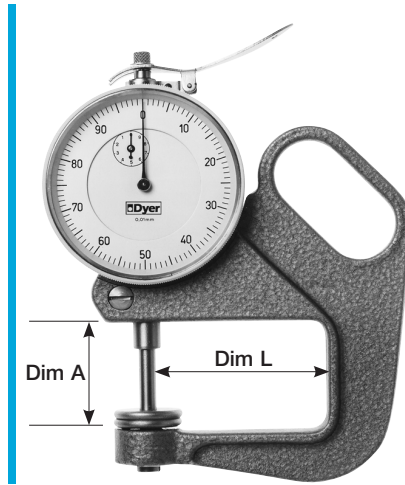

309-010 gage with dial indicator



309-210 with digital indicator

Standard contact point options

All lower contacts are set on a 3-screw tripod in a fixed position. They adjust easily to keep the lower contact in the fixed position.



Lower contact positioned on three adjustment screws. Easy-to-square contacts.

Includes Mechanical Dial Indicator, Contacts and Lifting Lever.

Models 12.00" and 16.00" have mounting base for tabletop.

Range*	"L" Dim Reach	"A" Dim	Graduation	Order No. With "A" Contacts	Order No. With "B" Contacts	Order No. With "C" Contacts	Order No. With "D" Contacts	Order No. With "E" Contacts
0-0.400"	2.0"	2.6"	0.0005"	309-005	309-010	309-015	309-020	309-025
0-0.400"	4.0"	1.4"	0.0005"	309-030	309-035	309-040	309-045	309-050
0-0.400"	8.0"	1.9"	0.0005"	309-055	309-060	309-065	309-070	309-075
0-0.400"	12.0"	1.9"	0.0005"	309-080	309-085	309-090	309-095	309-100
0-0.400"	16.0"	1.9"	0.0005"	309-105	309-110	309-115	309-120	309-125

Includes Electronic Digital Indicator, Contacts and Lifting Lever.

Models 12.00" and 16.00" have mounting base for tabletop.

Range*	"L" Dim Reach	"A" Dim	Graduation	Order No. With "A" Contacts	Order No. With "B" Contacts	Order No. With "C" Contacts	Order No. With "D" Contacts	Order No. With "E" Contacts
0-1.0"	2.0"	2.6"	0.0005"	309-205	309-210	309-215	309-220	309-225
0-1.0"	4.0"	1.4"	0.0005"	309-230	309-235	309-240	309-245	309-250
0-1.0"	8.0"	1.9"	0.0005"	309-255	309-260	309-265	309-270	309-275
0-1.0"	12.0"	1.9"	0.0005"	309-280	309-285	309-290	309-295	309-300
0-1.0"	16.0"	1.9"	0.0005"	309-305	309-310	309-315	309-320	309-325

* Range will change depending on indicator selection

