





Model Number	Length		Weight		Piston Stroke		Blows per min.	Throttle Handle	Bore		For use with Rivet Set Shank Diameter		Air Inlet (NPT)
	in.	mm	lbs.	kgs	in.	mm			in.	mm	in.	mm	
F4-PT-RT-B	8.8	223	3.3	1.5	4	102	1,700	Lever	.56	14	0.401	10.2	1/4"

For additional product information visit our website at <http://www.apextoolgroup.com>

“A”

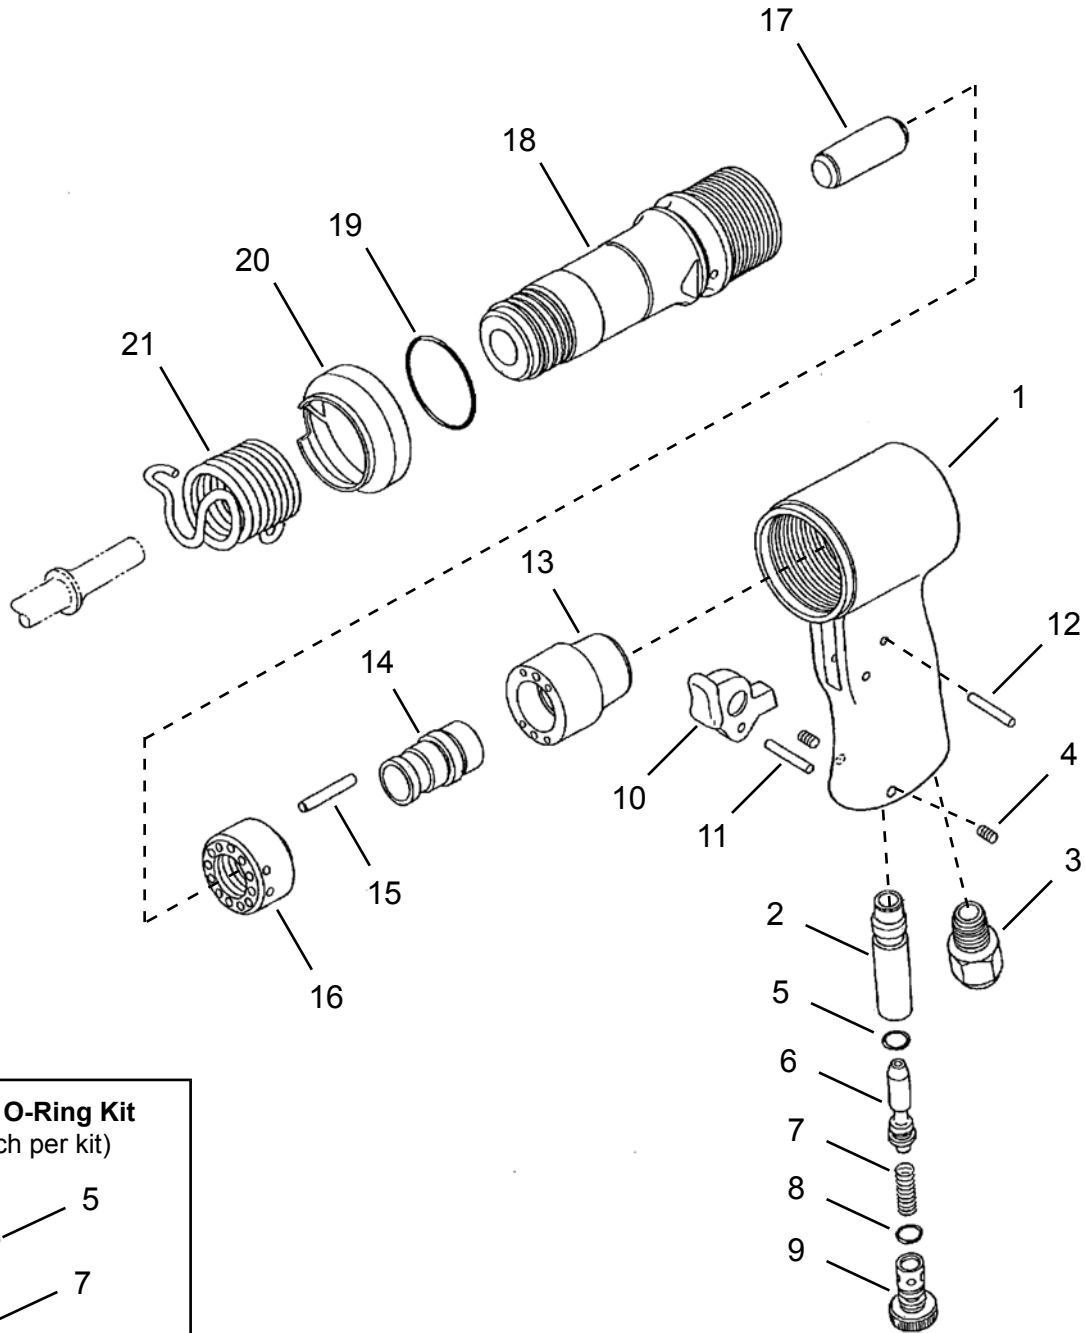

**301140 O-Ring Kit**  
(4 each per kit)

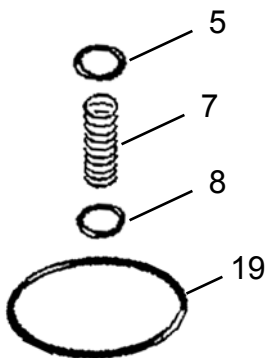

**Chisel Installation Procedure:**

1. Remove retainer spring (#21)
2. Install chisel into bushing (#18) inside cylinder
3. Thread retainer spring (#21) onto bushing (#18)
4. For chisel removal, repeat step 1.

**Illustration "A"**

Ref	Number	#	X	EN
				Description
1	---	1	K1	Handle (includes Ref. 2)
2	---	1	K1	Throttle Valve Bushing
3	---	1	K1	Inlet Bushing (NPT)
4	---	2	K1	Hex Socket Head Cap Screw (M5 x 8)
* 5	---	1	K3	Throttle Valve O-Ring (S-6)
6	---	1	K3	Throttle Valve
* 7	---	1	K3	Throttle Valve Spring
* 8	---	1	K3	Control Valve O-Ring (S-8)
9	---	1	K3	Control Valve
10	---	1	K2	Lever
11	---	1	K2	Spring Pin (3 x 22)
12	---	1	K2	Spring Pin (3 x 16)
13	---	1	K4	Valve Box
14	---	1	K4	Valve
15	---	1	K4	Valve Knock Pin
16	---	1	K4	Valve Seat
17	207195	1		Piston
18	207194	1		Cylinder
19	---	1	K5	O-Ring (JASO-2035)
20	207196	1		Exhaust Band
21	207197	1		Spring Retainer
<b>Repair Kits</b>				
K1	301136	1		Handle Assembly Kit
K2	301137	1		Trigger Assembly Kit
K3	301138	1		Control Valve Assembly Kit
K4	301139	1		Valve Assembly Kit
K5	301140	1		O-Ring / Spring Kit

(#) Quantity

(X) Included in Repair Kit

( \* ) Parts also included in (K5) 301140 O-Ring/Spring Repair Kit